

WORLD CLASS REFRIGERATION PROVIDER

>> MANIFOLD GAUGE SET







- 1: With sight glass brass testing manifold body.
- 2:36"3-pack colored charging hoses with 1/4"SAE fittings
- 3:One compound & pressure gauge
- 4: Working pressure R12/22/502 500 PSI/2500 PSI; R134A 600 PSI/3000 PSI; R410A 800 PSI/4000 PSI
- 5.CT-536G With 3pcs 36"hoses; CT-560G With 3pcs 60"hoses; CT-572G With 3pcs 72"hoses.
- 6.Anti-Shock Cover for your choose



- 1:With brass testing manifold body.
- 2:3pcs red, yellow blue charging hoses
- 3:One compound & pressure gauge 4: Working pressure R12/22/502 500 PSI/2500 PSI; R134A
- 600PSI/3000PSI;R410A800PSI/4000PSI
- 5.CT-636 With 3pcs 36" hoses; CT-660 With 3pcs 60
- "hoses; CT-672 With 3pcs 72" hoses.



- 1:With Aluminum alloy testing manifold body
- 2:36"3-pack colored charging hoses with 1/4"SAE fittings 3:One compound & pressure gauge
- 4: Working pressure R22/404A/134A/407C 600PSI/3000
- PSI;R410A 800PSI/ 4000PSI 5.CT-736-1 With 3pcs 36"hoses; CT-760-1 With 3pcs 60
- "hoses; CT-772-1 With 3pcs 72" hoses.



- 1:With Aluminum alloy testing manifold body and with anti-shock cover
- 2:36"3-pack colored charging hoses with 1/4"SAE fittings
- 3:One compound & pressure gauge 4:Working pressure R134A 600PSI/3000PSI
- 5.CT-736-A With 3pcs 36" hoses; CT-760-A With 3pcs 60
- "hoses; CT-772-A With 3pcs 72"hoses.



- 1. Anodized Aluminum Block Body (Can Choose Blue or Black Colour Body)
- 2.Oversized Sightglass For Easy Viewing
- 3.No-Flutter Gauge Design, Easy to Grip Knobs
- 4.Include Vacuum Gauge 5.One Full Turn Open/Close Valve 6. Excellent Vacuum Characteristics



- 1:With Aluminum alloy testing manifold body
 2:36"3-pack colored charging hoses with exit size yellow
 1/4"SAE red & blue 5/16" SAE
 3:One compound & pressure gauge
 4:Working pressure R22/404A/134A 600 PS1/3000 PS1;
 R410A 800 PS1/4000 PS1
 5.CT-736-2A With 3pcs 36"hoses; CT-760-2A With 3pcs
 60"hoses; CT-772-2A With 3pcs 72"hoses.
 6.With R134A Deluxe quick couplers and valve core remover,
 packing in the molded plastic box.



- 1:With Aluminum alloy testing manifold body
 2:36"3-pack colored charging hoses with exit size yellow
 1/4"SAE red & blue S/16" SAE
 3:One compound & pressure gauge
 4:Working pressure R22/404A/134A 600 PSI/3000 PSI;
 R410A 800PSI/4000PSI
 5.CT-736-2 With 3pcs 36"hoses; CT-760-2 With 3pcs 60
 "hoses; CT-772-2 With 3pcs 72"hoses.
 6.With Can Tap Valve CT-340 and packing in the molded plastic box.



MANIFOLD GAUGE TOOL <<







ALUMINUM BODY SINGLE GAUGE VALVE



ALUMINUM BODY SINGLE GAUGE VALVE










R12/22/502/404A/407C/134A 1/8" NPT brass connection, 2-3/4" dia.











1/4" SAE FITTING. 500 PSI/2500 PSI. CH-336 RYB 3 pcs 36"(90 cm) hose set. CH-360 RYB 3 pcs 60"(150 cm) hose set. CH-372 RYB 3 pcs 72"(180 cm) hose set.

1/4" SAE FITTING. 500 PSI/2500 PSI. CH-336 RY B 3 pcs 36"(90 cm) hose set. CH-360 RYB 3 pcs 60"(150 cm) hose set. CH-372 RYB 3 pcs 72"(180 cm) hose set.

1/4" SAE FITTING. 1/4" SAE FITTING. 600 PSI/3000 PSI. CH-336 RYB 3 pcs 36"(90 cm) hose set. CH-360 RYB 3 pcs 60"(150 cm) hose set. CH-372 RYB 3 pcs 72"(180 cm) hose set.









QC-12L QC-12H STRAIGHT QUICK COUPLER (1/4"SAE)

QC-12L QC-12H 90°QUICK COUPLER (1/4"SAE)

QC-12AL QC-12AH DELUXE ADJUSTABLE QUICK COUPLER











CT-337 Can Tap Valve For R12&R22 and R134A&R410A Refrigerant

CT-338 Can Tap Valve For R12&R22 Refrigerant

CT-339 Can Tap Valve For R134A Refrigerant

CT-340 Can Tap Valve (Suitable For Any Flat or Screw Type Cans)





For1/8"~5/8"(3-16mm)O.D.Tubing Zinc Alloy Body



For1/8"~5/8"(3-16mm)O.D.Tubing



For1/8"~7/8"(3-22mm)O.D.Tubing Zinc Alloy Body



For 1/8" $\sim 1-1/8$ " (3-28mm)O.D. Tubing Aluminum Allov Body



For 1/8" $\sim 1-1/8$ " (3-28mm)O.D. Tubing Aluminum Alloy Body



 $For 1/4 "{\sim} 1\text{-}5/8" (6\text{-}42mm) O.D. Tubing$ Aluminum Alloy Body



For 1/4",5/16", 3/8" O.D.



CT-364A-04 For 1/4" O.D. CT-364A-05 For 5/16" O.D. CT-364A-06 For 3/8"O.D. CT-364A-08 For 1/2"O.D. CT-364A-10 For 5/8"O.D. CT-364A-12 For 3/4"O.D. CT-364A-14 For 7/8"O.D.







CT-102-04 For1/4"O.D. CT-102-05 For 5/16" O.D. CT-102-06 For 3/8" O.D. CT-102-08 For 1/2" O.D.



CT-102-10 For 5/8" O.D. CT-102-12 For 3/4" O.D.





For 1/4",5/16",3/8",1/2", & 5/8" O.D.

For 1/4",5/16",3/8",1/2", & 5/8" O.D. For 1/4",5/16",3/8",1/2", & 5/8" O.D.



Pinch of Copper Tubing Up to 5/16" (8mm) onstantly For 1/4",3/8",3/16", 5/16"



Pinch of Copper Tubing Up to 5/16" (8mm) onstantly



For 8,9.10,11,12,14,15 spacing per inch



TUBE TOOL «

FRIEVER







CT-2020 45° FLARING TOOL

For 3/16", 1/4", 5/16", 3/8", 1/2" and 5/8" O.D. Tubing.
Blister Packing on a card.

CT 105 450 EL ADING TOOL

For 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" and 5/8" O.D. Tubing. Packing in color box.

CT 202 45° FLADING TOO

For 5/8", 3/4", 7/8", 1-1/8" O.D. Tubing. Packing in color box.







CT-525 45° GRABBER FLARING TOOL

For 3/16" to 5/8" O.D. Tubing. Packing in color box.

CT-275 FLARING & SWAGING TOOL KIT

For 1/8",3/16",1/4",5/16", 3/8",7/16",1/2",5/8"&3/4"O.D. Packed In Hand Carrying Plastic Case.

CT-278 FLARING & SWAGING TOOL KIT

=CT-275 (Flaring Tools Kit) +CT-274 (Tube Cutter)+CT-122 (Ratchet Wrench) Packed In Hand Carrying Plastic Case.







CT COEL ABING A SWAGING TOOL KIT

CT-1226 450FLARING & SWAGING TOOL KIT

For 1/4", 5/16", 3/8", 7/16", 1/2", 5/8" & 3/4"O.D. Packed In Hand Carrying Plastic Case.



=CT-195 (Flaring tools)+CT-274 (Tube Cutter)
Packed In Hand Carrying Plastic Case.







CT-808 45° ECCENTRIC CONE TYPE FLARING TOOL

=CT-806+CT-274(Tube Cutter)+ CT-208(Reamer) For 3/16",1/4",5/16",3/8",1/2", 5/8" & 3/4" O.D.

CT-100ALT

=CT-100(Expander handle+Expander Heads)+CT-312(Tube Cutter)+CT-208(Reamer)
For 3/8", 1/2", 5/8", 3/4", 7/8", 1" & 1-1/8" O.D.
1-1/4",1-3/8",1-1/2",1-5/8",1-3/4"O.D.

CT-999A 90OMULTIBENDER KIT

=CT-999+CT-312(Tube Cutter)+ CT-209(Reamer) For 1/4",5/16",3/8",1/2",5/8",3/4",7/8" O.D.




>>> WELDING GAS TORCH



FR-TH01	COPPER	BUTTERFLY BOWL TYPE	1400 ± 20℃	MAPP GAS OR MAPP PRO	MANUAL	OPTIONAL	
FR-TH1S					AUTO		
FR-THD1					MANUAL		
FR-TH3W-1					MANUAL	1.5M	
FR-TH3SW-1					AUTO		
FR-TH01A	COPPER	PISTON TYPE			MANUAL	OPTIONAL	
FR-TH1SA					AUTO		
FR-THD1A					MANUAL		
FR-TH3WA					MANUAL	1.5M	
FR-TH3SWA					AUTO		
FR-TH01B	ALUMINUM	PISTON TYPE			MANUAL	OPTIONAL	
FR-TH1SB					AUTO		
FR-THD1B					MANUAL		
FR-TH3WB					MANUAL	1.5M	
FR-TH3SWB					AUTO		
FR-TH02	COPPER	AUTOMATIC TYPE			AUTO	OPTIONAL	

FRIEVER >>> CLAMP METER

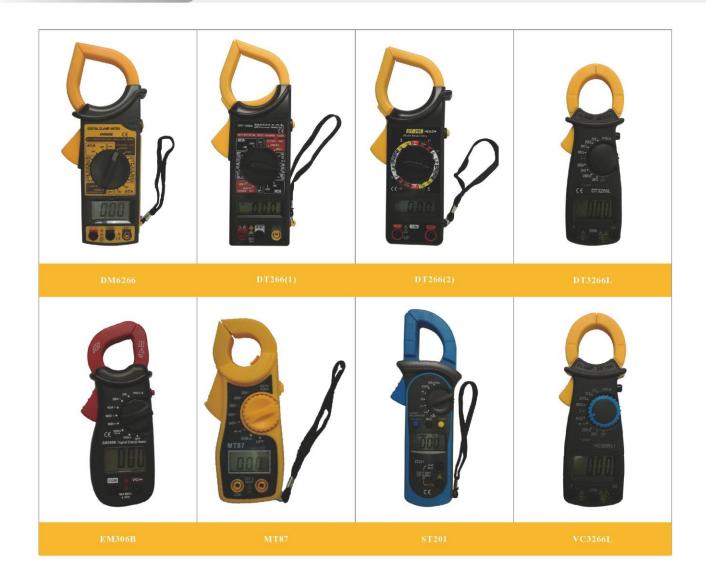

PRODUCT NAME	MODEL	DC VOLTAGE	AC VOLTAGE	AC CURRENT	۵	DIODE TESTING
	MT87	600V ± 1.0%	600V ± 1.2%	20-200-400A ± 2.5%	200KΩ ±1.0%	YSE
	VC3266L	600V ± 1.0%	600V ± 1.2%	2-20-200A ± 2.5%	200Κ-2ΜΩ	YSE
	DM6266	1000V ± 1.0%	750V ± 1.2%	200-1000A ± 2.5%	200-20K-20M- 2000MΩ ±1.0%	
CLAMP METER	DT266(1)	1000V ± 1.0%	750V ± 1.2%	200-1000A ± 2.5%	200-20K-20M- 2000MΩ ±1.0%	
	EM306B	600V ± 1.0%	600V ± 1.2%	20-200-400A ± 2.5%	200KΩ ±1.0%	YSE
	ST201	1000V ± 0.8%	750V ± 1.2%	20-200-1000A ±2.0%	200-2KΩ ± 1.0%	YSE
	DT3266L	600V ± 1.0%	600V ± 1.2%	20-200-600A ±2.5%	2K-200K-2MΩ ±1.0%	
	DT266 (2)	1000V ± 1.0%	750V ± 1.2%	200-1000A ±2.0%	200-20K-20M- 2000MΩ ± 1.0%	